

© EPODOC / EPO

BEST AVAILABLE COPY





PN - JP2001351232 A 20011221
 TI - POSITIONING METHOD OF DISK
 AB - PROBLEM TO BE SOLVED: To provide a positioning method of disk, which corrects deviation in position and accurately positions the same at all times, when two sheets of disks are brought into close contact with each other, while the respective center positions are made to coincide with each other.
 SOLUTION: A master disk 2 which is provided with a center hole 2a on the center position and a slave disk 1, in which a center hole 1a is formed on the center position, are disposed to face opposite to each other and the center hole 2a is imaged through the center hole 1a by a CCD camera 6. An image processing means 11 is provided with plural recognizing parameters, detects the deviation in the position of the center hole 2a, with respect to the center of the center hole 1a by selectively using the optimum recognizing parameter, which enables recognizing the center hole 2a from the image which is image picked up and moves the master disk 2 according to the direction of deviation in the position and the amount of the same.
 FI - G01B11/00&C; G01B11/00&H; G06T1/00&300; G11B5/86&C
 PA - MATSUSHITA ELECTRIC IND CO LTD; FUJI ELECTRIC CO LTD
 IN - MATSUDA NOBUHIDE; SAITO AKIRA
 AP - JP20000175238 20000612
 PR - JP20000175238 20000612
 DT - I

© WPI / DERWENT

AN - 2002-298095 [34]
 TI - Disk positioning method in e.g. magnetic disk manufacture, involves detecting direction of dislocation and amount of dislocation of recognized centering of master disk with respect to central hole of slave disk
 AB - JP2001351232 NOVELTY - A centering (2a) on a master disk (2) is photographed by viewing through a central hole (1a) of a slave disk (1). The in the photographed image is recognized using recognition parameters. The direction of dislocation and amount of dislocation of the with respect to the hole is detected, based on which the position of the master disk or the slave disk is adjusted such that center of the disks are in accord.
 - USE - For use in manufacture of magnetic disk, hard disk.
 - ADVANTAGE - Image recognition for positioning the disk is performed correctly with high precision, thereby favorable disk positioning adjustment is performed exactly.
 - DESCRIPTION OF DRAWING(S) - The figure shows a block diagram of the disk positioning device and exchange mechanism of the master disk.
 - Slave disk 1
 - Central hole 1a
 - Master disk 2
 - Centering 2a
 - (Dwg.1/3)
 IW - DISC POSITION METHOD MAGNETIC DISC MANUFACTURE DETECT DIRECTION DISLOCATE AMOUNT DISLOCATE RECOGNISE CENTRE MASTER DISC RESPECT CENTRAL HOLE SLAVE DISC
 PN - JP2001351232 A 20011221 DW200234 G11B5/86 005pp
 IC - G01B11/00 ; G06T1/00 ; G11B5/86
 MC - T03-A02B1A T03-A02E1A
 DC - T03
 PA - (FJIE) FUJI ELECTRIC CO LTD
 - (MATU) MATSUSHITA DENKI SANGYO KK
 AP - JP20000175238 20000612
 PR - JP20000175238 20000612

© PAJ / JPO

JP2001351232


PN - JP2001351232 A 20011221
TI - POSITIONING METHOD OF DISK
AB - **PROBLEM TO BE SOLVED:** To provide a positioning method of disk, which corrects deviation in position and accurately positions the same at all times, when two sheets of disks are brought into close contact with each other, while the respective center positions are made to coincide with each other.
- **SOLUTION:** A master disk 2 which is provided with a center  2a on the center position and a slave disk 1, in which a center hole 1a is formed on the center position, are disposed to face opposite to each other and the center  2a is imaged through the center hole 1a by a CCD camera 6. An image processing means 11 is provided with plural recognizing parameters, detects the deviation in the position of the center  2a, with respect to the center of the center hole 1a by selectively using the optimum recognizing parameter, which enables recognizing the center  2a from the image which is image picked up and moves the master disk 2 according to the direction of deviation in the position and the amount of the same.

I - G11B5/86 ; G01B11/00 ; G06T1/00
PA - MATSUSHITA ELECTRIC IND CO LTD; FUJIELECTRIC CO LTD
IN - MATSUDA NOBUHIDE; SAITO AKIRA
ABD - 20020804
ABV - 200204
AP - JP20000175238 20000612

BEST AVAILABLE COPY

BEST AVAILABLE COPY

(a)

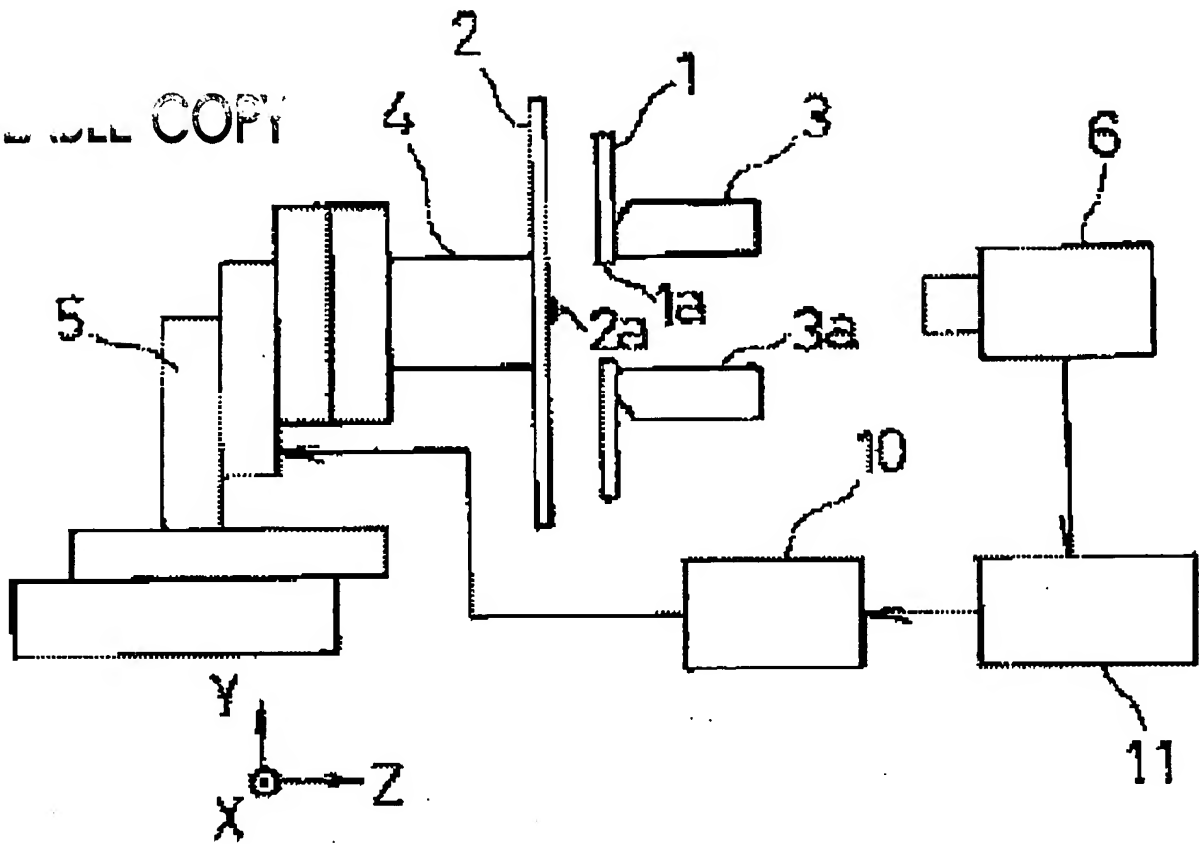

(b)

